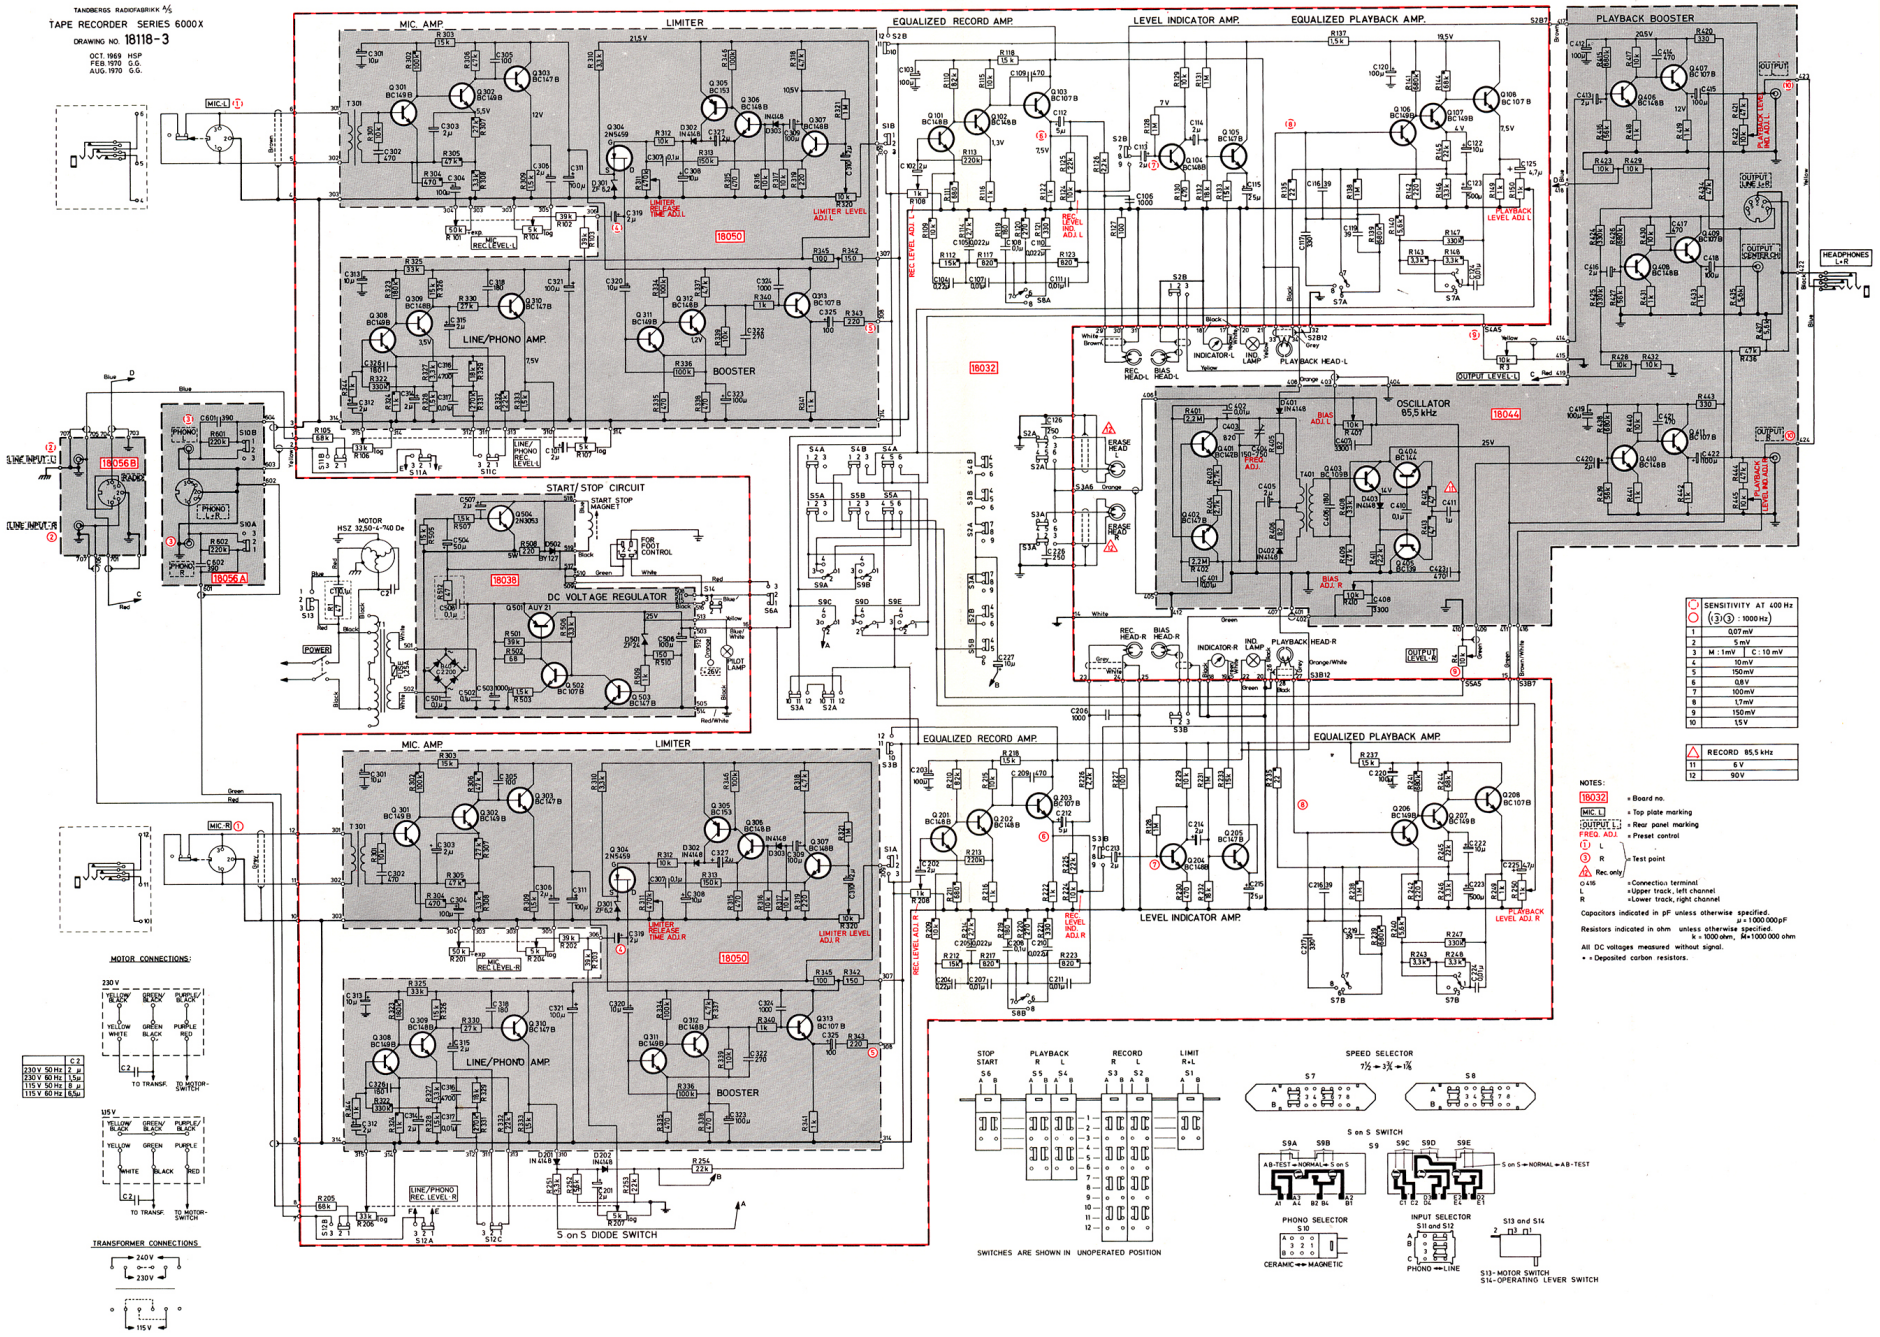
TANDBERGS RADIOFABRIKK A/S
TAPE RECORDER SERIES 6000 X
DRAWING NO. 18118-3
OCT. 1969 HSP
FEB. 1970 G.G.
AUG. 1970 G.G.
MIC. AMP.
LIMITER
EQUALIZED RECORD AMP.
LEVEL INDICATOR AMP.
EQUALIZED PLAYBACK AMP.
PLAYBACK BOOSTER
LINE/PHONO AMP.
BOOSTER
OSCILLATOR 85,5 kHz
START/STOP CIRCUIT
DC VOLTAGE REGULATOR
18050
18032
18044
18038
18056 B
18056 A
MIC-L
MIC-R
LINE INPUT L
LINE INPUT R
HEADPHONES L+R
POWER
MOTOR HSZ 32.50-L-960 De
MOTOR CONNECTIONS:
TRANSFORMER CONNECTIONS
5 on 5 DIODE SWITCH
SWITCHES ARE SHOWN IN UNOPERATED POSITION
SPEED SELECTOR
S on S SWITCH
PHONO SELECTOR
INPUT SELECTOR
S13 and S14
S13- MOTOR SWITCH
S14- OPERATING LEVER SWITCH
SENSITIVITY AT 400 Hz
RECORD 85,5 kHz
NOTES:
Capacitors indicated in pF unless otherwise specified.
Resistors indicated in ohm unless otherwise specified.
All DC voltages measured without signal.
• = Deposited carbon resistors.