


SKALA- OG FORKRETSSTRIMNING			
BÅND	FREKVENS	SKALA	FORRR.
FM	89 Mc/s	L5	L4
	99	C19	C4
K	6,5	L28	L9
	20	C37	C24
F	1,8	L29	L10
	5	C38	C25
M	600	L30	L11
	1300	C60	C26
L	170	L25	L12
	320	C54	C27

MF-TRIMMING	
455kc/s	L32 L19 L15 L26 L3
	OSCILLOSKOP TIL DIODEUTTAK.
	L33 L27 L16 L20 L13 L14
	SIGNALGEN. MOD. 200 kc/s TILKOPL. OVER C10 (PUNKT a) MED SERIEKOND. 10000 pF. MF-KURVE TAS UT OVER R21. SIGNAL INH 10 mV. DISKRIM. KURVE TAS UT OVER C66. SIGNAL INH REG. TIL SPENNING OVER ETHER = 2 VOLT. OSCILLOSKOP TILKOPLES MED 0,2 MΩ SERIEHJOTSTAND.

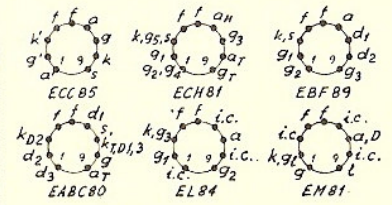

SØLVSUPER 7  
TANDBERGS RADIOFABRIKK A/S

TEGN. NR. 3075 FRA APPARAT NR. 350 001

